



Catalog Number	
Project	Type

## Features & Specifications

### Application

Low profile, narrow, 2 light fluorescent wraparound perfect for commercial spaces, schools, dormitories, offices and retail spaces.

### Features

All fixture parts snap together for ease of installation and maintenance. Housing accepts lift-and-shift prismatic lenses and frames that fit flush to the ceiling.

### Construction

Housing constructed of die-formed heavy gauge steel. Side flanges add maximum rigidity.

### Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.


### Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

## W9 SERIES 9" WRAPS



### DIMENSIONS



Please contact your Horizon Sales Representative for more information.  
All dimensions subject to change without notice.


### Ordering Nomenclature

Ex: (9" Wrap, 2 Lamps, 32W T8, 4', Multi-Volt = W9232D)

--	--	--	--	--	--


SERIES	NUMBER OF LAMPS	WATTAGE	VOLTAGE	BALLAST FACTOR	OPTIONS
W9	2	14 - 14W T5, 22" 17 - 17W T8, 24" 28T5 - 28W T5, 46" 28T8 - 28W T8, 48" 32 - 32W T8, 48" 48HO - 60W 800mA, 48" 54 - 54W T5HO, 46"	D - Multi-Volt 1 - 120V 2 - 277V 3 - 347V 4 - 480V  *Multi-Volt is 120/277V	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start P - Program Start 20 - ≤20% THD EB5 - 500 Lumen Emergency Ballast EB7 - 700 Lumen Emergency Ballast EB14 - 1400 Lumen Emergency Ballast EB30 - 3000 Lumen Emergency Ballast FBF - Fast-Blow Fuse SBF - Slow-Blow Fuse AF6 - 6', 3/8" dia., Armored Flex Cable SJ6 - 6', 3/8" dia., 16/3 SJ Cord SJ10 - 10', 3/8" dia., 16/3 SJ Cord PW0 - Palletized without Cartons CD - Continuous Dimming (T8) SD - Step Dimming (T8) CD5 - Continuous Dimming (T5) SD5 - Step Dimming (T5) WOC - 120/277 Volt Sensor WOC1 - 347/480 Volt Sensor

POLAR GRAPH

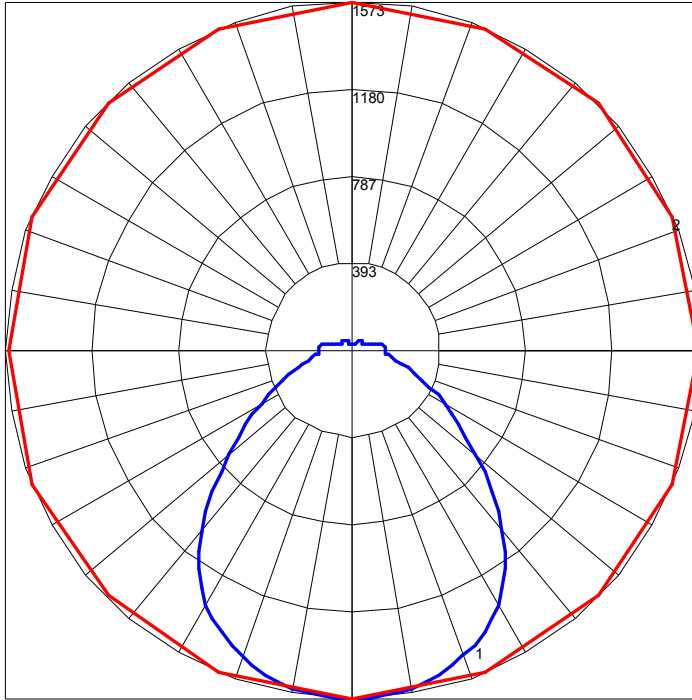

Maximum Candela = 1573 Located At Horizontal Angle = 45, Vertical Angle = 2.5  
# 1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)

POLAR GRAPH

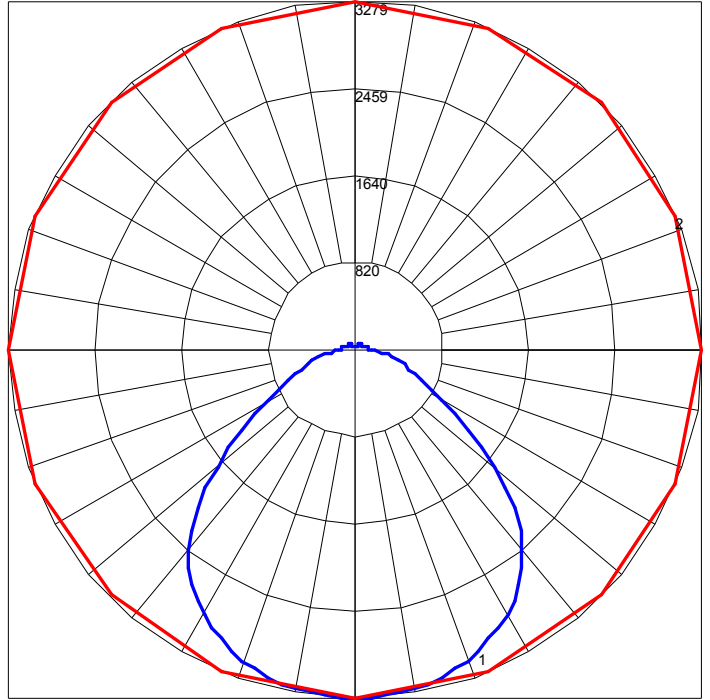

Maximum Candela = 3279 Located At Horizontal Angle = 45, Vertical Angle = 2.5  
# 1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (2.5) (Through Max. Cd.)