



Catalog Number	
Project	Type

Features & Specifications

Application

This fixture is an excellent choice for commercial industrial and retail applications such as storage/utility areas, shops, task and general area lighting.

Features

Optimized for T8 or T5 lamp performance. Premium housing crimped along sides for extra rigidity and straight alignment. Features pressure lock lamp holders. Accepts optional plug-in wiring feature for continuous row installation. Alignment couplers furnished for continuous row installation. Can be surface or pendant mounted, individual or in rows. Numerous KO's for easy installation.

Construction

Fixture housing, lamp holder brackets, end sections and channel over constructed of heavy gauge die-formed steel. Crimped along sides for extra rigidity and straight alignment.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WS SERIES WIDE ECONOMY STRIP



DIMENSIONS

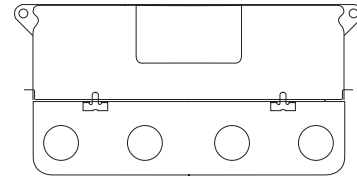

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wide Strip, 4, F32T8, 4', Multi-Volt =WS432D)

--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	VOLTAGE	BALLAST FACTOR	OPTIONS
WS WSA (Aluminum)	3	14 - 14W T5, 22"	D - Multi-Volt	BLANK - Normal	10RS - ≤10% THD, Rapid Start
For tandem double-length unit, add suffix T Ex: ST	4 (Per cross section)	17 - 17W T8, 24"	1 - 120V	H - High	P - Program Start
		21 - 21W, T5, 34"	2 - 277V	L - Low	20 - ≤20% THD
		24 - 24W T5HO, 22"	3 - 347V		EB5 - 500 Lumen T8 Emergency Ballast
		25 - 25W, T8, 36"	4 - 480V		EB7 - 700 Lumen T8 Emergency Ballast
		28T5 - 28W T5, 46"			EB14 - 1400 Lumen T8 Emergency Ballast
		28T8 - 28W T8, 48"	*Multi-Volt is 120/277V		EB30 - 3000 Lumen T8 Emergency Ballast
		32 - 32W T8, 48"			EB5T5 - 500 Lumen T5 Emergency Ballast
		39 - 39W, T5HO, 34"			EB7T5 - 700 Lumen T5 Emergency Ballast
		48HO - 60W 800mA, 48"			EB14T5 - 1400 Lumen T5 Emergency Ballast
		54 - 54W T5HO, 46"			FBF - Fast-Blow Fuse
					SBF - Slow-Blow Fuse
					AC63 - 6', 3/8" dia., Armored Flex Cable
					SJ6 - 6', 3/8" dia., 16/3 SJ Cord
					SJ10 - 10', 3/8" dia., 16/3 SJ Cord
					SJ15 - 15', 3/8" dia., 16/3 SJ Cord
					PWO - Palletized without Cartons
					CD - Continuous Dimming (T8)
					SD - Step Dimming (T8)
					CD5 - Continuous Dimming (T5)
					SD5 - Step Dimming (T5)
					WOC - 120/347 Volt Sensor
					WOC1 - 480 Volt Sensor
					C1 - 6' Cord w/120V Nema Plug 16/3 15A
					C2 - 6' Cord w/277V Nema Plug 16/3 15A
					C3 - 10' Cord w/277V Nema Plug 16/3 20A
					C4 - 6' Cord w/480V Nema Plug 16/3 20A
					WH34 -Wiring Harness 3-Wire 4-Foot
					WH44 -Wiring Harness 4-Wire 4-Foot
WH54 - Wiring Harness 5-Wire 4-Foot		THE - Tong Hanger, End Mount (2)			
WH38 - Wiring Harness 3-Wire 8-Foot		THS - Tong Hanger, Side Mount (2)			
WH48 - Wiring Harness 4-Wire 8-Foot		G10 - 10' Aircraft Cable w/ 12" Arms (2)			
WH58 - Wiring Harness 5-Wire 8-Foot		G15 - 15' Aircraft Cable w/ 12" Arms (2)			
AR2 - 2' Assymetrical Reflector		G20 - 20' Aircraft Cable w/ 12" Arms (2)			
AR3 - 3' Assymetrical Reflector		SWG2 - 2' Wire Guard For Strip			
AR4 - 4' Assymetrical Reflector		SWG3 - 3' Wire Guard For Strip			
10JC - (3)S Hooks and 10' Jack Chain Set		SWG4 - 4' Wire Guard For Strip			

Energy Saving Tip!
Our Occupancy Sensor
option instantly turns
lights on and off