



| | |
|----------------|------|
| Catalog Number | |
| Project | Type |

FEATURES & SPECIFICATIONS

FEATURES — Combines an exit sign and emergency light into one low-profile unit. Energy-efficient LED technology. EZ snap-out chevron direction indicators. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing. Long-life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


MOUNTING — Ceiling mount with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

ILLUMINATION — Ultra-bright, energy efficient, long-life Red or Green LED. Offers 11W of remote capability

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



LED Exit/Emergency Combo LCLE SERIES

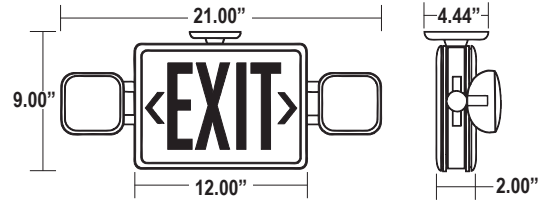

| Series | Housing Height | Length & Width |
|-------------|----------------|----------------|
| LCLE | 9.00" | 21.00" x 2.00" |

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

| LCLE | | | | | |
|-------------|--------------------------------|--|----------------------------------|--|---|
| Series | Letter Color | Number of Faces | Housing Color | Battery | Options |
| LCLE | R Red G Green | 1 Single Face 2 Double Face | W White B Black | Blank Battery Back-Up Standard | SD Self Diagnostic RC Remote Capable H High Output 12 LED Heads |

Example: **LCLER2W**