



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The high performance luminaire is designed for applications where long life, low maintenance, and consistent color rendering is required. Areas with limited accessibility due to fixture location or where heavy pedestrian or vehicle traffic makes maintenance difficult are ideal applications such as parking lots or walkways. The contemporary design makes the fixture ideal for applications where daytime aesthetics need to be taken into consideration.

CONSTRUCTION — The aesthetically pleasing modern housing is constructed of extruded aluminum. The vaulted dome allows for exceptional ventilation of the LED heat sinks in order to maintain cool operation. The optical assemblies are sealed in place using a silicone gasket for weather tight protection. Modular LED bricks wired in parallel for ease of maintenance. ETL listed for wet locations (IP64). Additional IP66 rating available upon request.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

OPTICAL SYSTEM — Made with a state of the art UV stabilized acrylic high performance refractive optical assemblies that use high transmittivity materials to achieve precise photometric distributions. Available in Type II, III, IV, V Medium and V Wide beam configurations. Star Light Friendly (meets or exceeds Dark Sky requirements) in the horizontal position.

ELECTRICAL SYSTEM — Available in up to a 4 brick LED system in 5000K Cool White (+/- 500K) or 4100K Neutral White color temperatures propagated with Philips Lumileds LUXEON® T LED's. Available with 90-300V 50/60 Hz Class II power supply. LED's rated over 425,000 hours (TM21 Calculated L70) at

LENM SERIES

Large Extruded LED Luminaire



SERIES	HOUSING HEIGHT	LENGTH & WIDTH	EPA (FT²)
LENM	9.47"	21.20" x 17.69"	1.1

25°C ambient temperature with selectable 700mA operation. Lumen Maintenance >97% at 50K hrs. 347V and 480V input options available. Standard 0-10V dimming. Fixture provided with integral 10KV surge protection that meets IEEE C62.42.2-2002. Built-in Active PFC Function. LED Power Supply conforms to UL1310 Class 2 and UL8750 standards and is IP67 rated for wet locations.

MOUNTING — Standard mounting options include 2", 8", and 10.75" straight arms. Additional mounting options may be available for custom applications.

LISTINGS — LED Power Supply listed for wet locations (IP67). LED bricks ETL listed for wet locations (IP64). Meets US and Canadian safety standards. -40°C to 50°C ambient operation. RoHS Compliant.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:

**LENM3C8T5WC1BZ
DIM**

LENM							
SERIES	# OF BRICKS	COLOR TEMP	# LED'S PER BRICK	OPTICS	DRIVE CURRENT	VOLTAGE	FINISH
	3 = 3 Brick 4 = 4 Brick	C = Cool White (5000K) N = Neutral White (4100K)	X = 8 XHP70 LEDs	T2 = Type II T3 = Type III T4 = Type IV T4A = Type IV Auto T5M = Type V Medium T5W = Type V Wide	C = 700 mA	1 = Multi-Volt ¹ 2 = 480V 3 = 347	BZ = Bronze BK = Black GR = US Green WH = White SP = Special ²

ACCESSORIES

(Order as separate line items)

- SSA-S³** Straight Arm Mount (2")
- SSA-M** Straight Arm Mount (8")
- SSA** Straight Arm Mount (10.75")
- S192** Medium Back Side Shield
- LOKTAB** Tamper Resistant LED Brick Locking Tabs (12)
- IP66⁴** Additional IP66 Fixture Rating
- LEDOPTIC-W** Spill Light Elimination
- LEDOPTIC-B** Spill Light Elimination "Black Out"

NOTES


- 1 = Multi-Volt is an auto ranging power supply from 100V to 300V input.
- 2 = Custom RAL color matching is available. Contact your sales representative for additional info.
- 3 = SSA-S Arm cannot be used when pole mounting fixtures at 90° increments.
- 4 = Additional IP66 rating may not be changed once production has begun on the fixtures.



LENM Large Extruded LED Luminaire

AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Mounting options must be ordered separately.

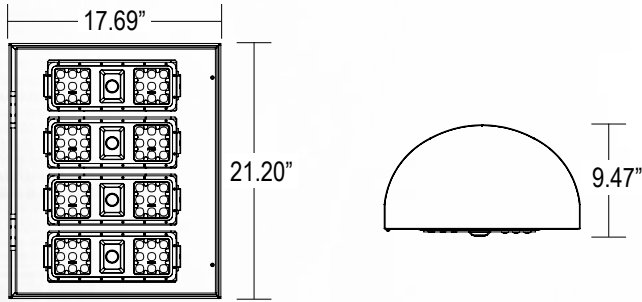

MOUNTING ACCESSORIES

SSA-S³, SSA-M, SSA
2", 8" and 10.75" Straight Arms



NOTES

3 = SSA-S Arm cannot be used when pole mounting fixtures at 90° increments.

LUMINAIRE CHARACTERISTICS

Cool White (5000K) 700 mA Drive Current

# of LED Bricks	# of LEDs per Brick	Color Temp	Delivered Lumens						System Wattage	L70 @ 25°C	Amperage Draw					
			TYPE II	TYPE III	TYPE IV	TYPE 4A	TYPE 5M	TYPE 5W			120V	208V	240V	277V	347V	480V
3 BRICK	18	CW	12167	11980	12122	11975	12041	12195	122	>495K	1.02 A	.59 A	.51 A	.45 A	.36 A	.26 A
			B3 U0 G2	B3 U0 G2	B3 U0 G2	B3 U0 G1	B3 U0 G1	B4 U0 G2								
4 BRICK	18	CW	16222	15974	16162	15967	16054	16260	162	>495K	1.35 A	.78 A	.68 A	.59 A	.47 A	.34 A
			B3 U0 G2	B3 U0 G2	B3 U0 G2	B3 U0 G2	B4 U0 G2	B4 U0 G2								

Neutral White (4100K) 700 mA Drive Current

# of LED Bricks	# of LEDs per Brick	Color Temp	Delivered Lumens						System Wattage	L70 @ 25°C	Amperage Draw					
			TYPE II	TYPE III	TYPE IV	TYPE 4A	TYPE 5M	TYPE 5W			120V	208V	240V	277V	347V	480V
3 BRICK	18	CW	11906	11724	11862	11719	11783	11934	122	>495K	1.02 A	.59 A	.51 A	.45 A	.36 A	.26 A
			B3 U0 G2	B3 U0 G2	B3 U0 G2	B3 U0 G1	B3 U0 G1	B4 U0 G2								
4 BRICK	18	CW	15875	15632	15816	15625	15711	15912	162	>495K	1.35 A	.78 A	.68 A	.59 A	.47 A	.34 A
			B3 U0 G2	B3 U0 G2	B3 U0 G2	B3 U0 G2	B4 U0 G2	B4 U0 G2								

WARNING: Maintenance performed including the replacement of LED bricks while power is still supplied to the luminaire may result in system failures and will void the warranty.



TECHLIGHT
INNOVATION IN ILLUMINATION

2707 SATSUMA | DR. DALLAS, TX 75229 | PH: 800.225.0727 | FX: 214.350.0591 | www.techlightusa.com

All dimensions and specifications are subject to change without notice.

REV: 20170425-01