



Catalog Number	
Project	Type

Features & Specifications

Application

A linear 6 x 6 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas. The M6 fixture can be installed individually or in continuous rows. It can be mounted in a grid ceiling, a sheetrock ceiling using a flange, surface mounted, or wall mounted.

Features

Optimized for T8 or T5 lamp performance. Computer-aided housing design allows for optimum luminaire efficiency.

Construction

Housing constructed heavy gauge cold rolled steel. Die-formed flat steel door with mitered corners for clean appearance. Easily removable diffuser for lamp access and cleaning.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

M6 SERIES 6X6 FIXTURE



DIMENSIONS

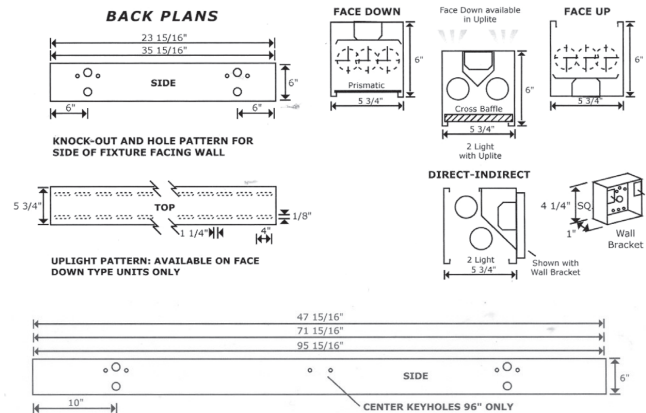

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (6 x 6, 2 Lamp, 32W T8, Grid Mount, 4', #12-.100" Acrylic Lens, Multi-Volt = M6232GD)

--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	LAMP	MOUNTING	LENS	VOLTAGE	BALLAST FACTOR	OPTIONS
M6 For tandem double-length unit, add suffix T Ex: M6T	1 2 (Per cross section)	14 - F14T5, 22" 17 - F17T8, 22" 21 - F21T5, 34" 24 - F24T5HO, 22" 25 - F25T8, 36" 28T5 - F28T5, 46" 32 - F32T8, 48" 54 - F54T5, 46"	G -Grid F -Flange S -Surface W -Wall	BLANK -#12 Acryl .100" thick A -#12 Acrylic .125" thick B -#12 Acrylic .156" thick C -#15 Acrylic .125" thick D -#15 Acrylic .140" thick E -1.5" Semi-Specular Louver F -2" Semi-Specular Louver G -1/2" Egg Crate	D -Multi-Volt 1 -120V 2 -277V 3 -347V 4 -480V *Multi-Volt is 120/277V	BLANK - -Normal H - High L - Low	P - Program Start EB5 - 500 Lumen Emergency Ballast EB7 - 700 Lumen Emergency Ballast EB14 - 1400 Lumen Emergency Ballast EB30 - 3000 Lumen Emergency Ballast EBT55 - 500 Lumen T5 Battery Backup EBT57 - 700 Lumen T5 Battery Backup EBT514 - 1400 Lumen T5 Battery Backup FBF - Fast-Blow Fuse SBF - Slow-Blow Fuse AC63 - 6', 3/8" dia., Armored Flex Cable CD - Continuous Dimming (T8) SD - Step Dimming (T8) CD5 - Continuous Dimming (T5) SD5 - Step Dimming (T5)