



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Heavy duty construction. NY approved housing. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Heavy 20-gauge steel construction. White powder coat finish (standard). Side and top conduit knockouts. Thermoplastic emergency lamp heads.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


MOUNTING — Side and top conduit knockouts.

ILLUMINATION — Adjustable, glare-free PAR-Type lamp heads. Optional 3rd head included. 6V model offers 9W lamps, standard. 12V model offers 12W lamps, standard. Remote capability available on 12V model only

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



New York Approved Emergency Light NYHD SERIES

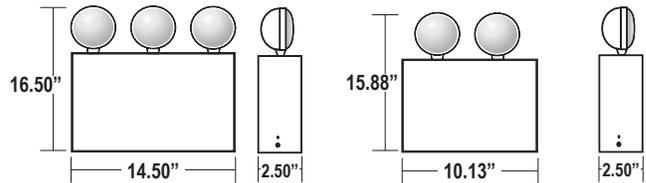

Series	Housing Height	Length & Width
HD	3H: 16.50", 2H: 15.88"	3H: 14.50" x 2.50", 2H: 10.13" x 2.50"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **NYHD12V50**

Series		Voltage		Unit Wattage		Options	
NYHD		6V 6 Volt		18¹ 18 Watt (2 Head)		RC³ Remote Capable	
		12V 12 Volt		27¹ 27 Watt (3 Head)		B Black Housing	
				50² 50 Watt (3 Head)			

NOTES

- 1 18W and 27W units available in 6V only.
- 2 50W unit available in 12V only.
- 3 Remote Capable option available on 50W unit only.