


RTP ROUND TAPERED POLE

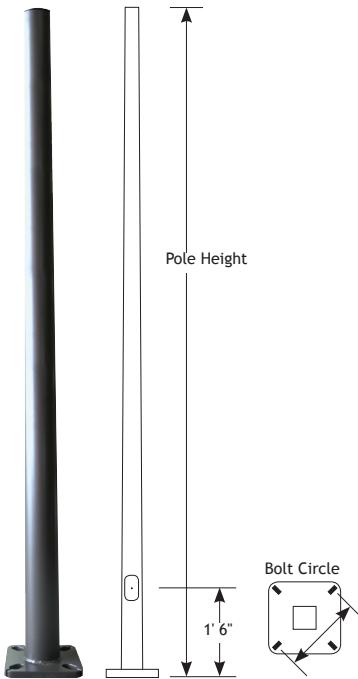

Pole

The pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 55,000 PSI and conforms to ASTM A500 grade C requirements. The shaft construction is a single piece of formed steel welded longitudinally. The hand hole is located 1' 6" above the pole base. A ground lug is provided standard.

Anchor Base

The anchor base is fabricated from a structural quality hot rolled carbon steel plate that has a minimum yield strength of 36,000 PSI. The anchor base telescopes the pole shaft and has a circumferential weld on the top and bottom.

Base Cover

A full base cover is provided which encapsulates the base plate and anchor bolts to provide a clean transition from pier to pole.

Finish

The pole is finished with a Super Durable Powdercoat Paint. Multiple colors available. Galvanizing and T-Guard treatments available upon request. Additional warranty extensions available with these treatments.

Round Tapered Pole	Pole Height	Wall Gauge	Finish	Mounting	Max EPA (1.3 MPH Gust)			Bolt Circle	Anchor Bolt Size	Shipping Weight
					90 MPH	100 MPH	110 MPH			
RTP	20	11	(A)	(B)	26.1	20.4	16.2	10"	1"x36"x4"	158 lbs
RTP	24	11	(A)	(B)	23.2	17.9	14.0	10"	1"x36"x4"	188 lbs
RTP	24	7	(A)	(B)	37.7	29.7	23.7	10"	1"x36"x4"	293 lbs
RTP	25	11	(A)	(B)	22.0	16.9	13.2	10"	1"x36"x4"	269 lbs
RTP	30	11	(A)	(B)	19.0	14.4	10.9	10.5"	1"x36"x4"	305 lbs
RTP	35	11	(A)	(B)	18.6	13.8	10.2	12.5"	1"x36"x4"	379 lbs
RTP	39	11	(A)	(B)	17.8	12.9	9.3	12.5"	1"x36"x4"	373 lbs
RTP	39	7	(A)	(B)	29.9	22.7	17.4	12.5"	1"x36"x4"	535 lbs
RTP	45	11	(A)	(B)	12.7	8.3	5.0	15"	1"x36"x4"	532 lbs
RTP	45	7	(A)	(B)	23.7	17.2	12.4	15"	1.25"x42"x6"	800 lbs
RTP	50	11S10 ¹	(A)	(B)	13.6	9.1	5.8	15"	1.25"x42"x6"	502 lbs
RTP	50	7S10 ¹	(A)	(B)	24.9	18.2	13.3	15"	1.25"x42"x6"	645 lbs
RTP	50	11	(A)	(B)	13.6	9.1	5.8	15"	1.25"x42"x6"	554 lbs
RTP	50	7	(A)	(B)	19.9	14.5	10.6	15"	1.25"x42"x6"	802 lbs


Option Codes

(A) Finish

- BK - Black
- BZ - Bronze
- GR - OD Green
- WH - White
- USG - US Green
- GLV - Galvanized
- GLVP - Galvanized & Painted
- (must specify paint color - example: GLVP-BRZ)
- TG - T-Guard Internal Coating
- (must specify paint color - example: TG-BRZ)
- SP - Special

(A) Mounting

- T238 - 2 3/8" OD tenon (standard)
- T278 - 2 7/8" OD tenon
- T312 - 3 1/2" OD tenon
- PC - Pole Cap Only
- DM1 - Drill One Side
- DM290 - Drill 2 Sides at 90°
- DM2180 - Drill 2 Sides at 180°
- DM390 - Drill 3 Sides at 90°
- DM3120 - Drill 3 Sides at 120°
- DM490 - Drill 4 Sides at 90°



*Anchor Bolts and Template can be pre-shipped at the customers' expense upon request.

Notes: 1-The RTP5011S10 and RTP507S10 are single piece poles.