



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Compact, low-profile design in neutral finish. Fully-gasketed polycarbonate enclosure provides resistance to corrosive atmospheres and non-hazardous environments. UL listed for wet locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

CONSTRUCTION — Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in a gray finish.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


MOUNTING — Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections. Conduit mount knockouts on back plate.

ILLUMINATION — Two fully adjustable, ultra-bright, round 6V, 7W MR-16 halogen lamp heads.

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



Wet Location MR16 Emergency Light R-16WL SERIES

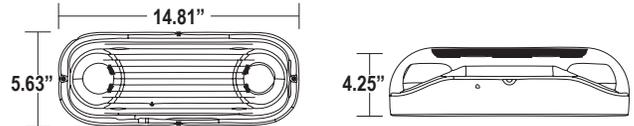

Series	Housing Height	Length & Width
R-16WL	5.63"	14.81" x 4.25"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

R-16WL		
Series	Housing Color	Options
R-16WL	G Gray	HT Internal Heater

Example: **R-16WLG**