



Catalog Number	
Project	Type

**FEATURES & SPECIFICATIONS**

**FEATURES** — Compact, low-profile design in neutral finish. Universal mounting plate with EZ Quick Connect for fast installation. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**CONSTRUCTION** — Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish..

**ELECTRICAL SYSTEM** — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


**MOUNTING** — Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections. Conduit mount knockout on top of housing.

**ILLUMINATION** — Two fully adjustable 6V, 5W MR-16 halogen lamp heads.

**WARRANTY** — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



**MR16 Emergency Light  
R-16 SERIES**

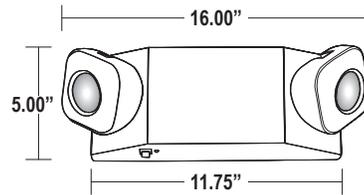

Series	Housing Height	Length
<b>R-16</b>	5.00"	16.00"

**ORDERING INFORMATION**

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

<b>R-16</b>		
Series	Housing Color	Options
<b>R-16</b>	<b>W</b> White <b>B</b> Black	<b>SD</b> Self Diagnostic <b>CP</b> Cord and Plug <b>HT</b> Internal Heater

Example: **R-16W**