



Catalog Number	
Project	Type

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms, utility/area, and task lighting.

Features

Optimized for T8 lamp performance. To direct illumination down, fixture is equipped with a matching metal front.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with a smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Comes standard with ballast disconnects for safe maintenance.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV335 SERIES WALL / VANITY 335



DIMENSIONS

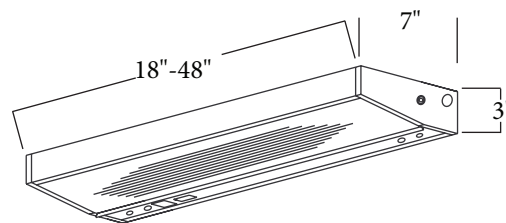

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 335, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV33513248SWD)

--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	DIFFUSER	VOLTAGE	BALLAST FACTOR	OPTIONS	
WV335	1	15 - 15 watt T8 (18")	18 - 18"	SW - Smooth White	D - Multi-Volt	BLANK - Normal	10RS - ≤10% THD, Rapid Start	
	2	17 - 17 watt T8 (24")	24 - 24"	CP - Clear Prismatic	1 - 120V	H - High	P - Program Start	
		25 - 25 watt T8 (36")	36 - 36"		2 - 277V		20 - ≤20% THD	
	2	32 - 32 watt T8 (48")	48 - 48"	*CFL - SPECIAL ORDER	3 - 347V	4 - 480V	L - Low	EB5 - 500 Lumen Emergency Ballast
		28T8 - 28 watt T8 (48")						EB7 - 700 Lumen Emergency Ballast
							EB14 - 1400 Lumen Emergency Ballast	
							EB30 - 3000 Lumen Emergency Ballast	
							FBF - Fast-Blow Fuse	
							SBF - Slow-Blow Fuse	
							PC - Pull Chain	
							RS - Rocker Switch	
							CO - Convenience Outlet	