



Catalog Number	
Project	Type

Features & Specifications

Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms, utility/area, and task lighting.

Features

Optimized for T8 lamp performance. Comes standard with a .125" clear polycarbonate lens that is impact and tamper resistant.

Construction

Housing constructed of structurally embossed, heavy gauge, cold rolled steel with a smooth white lens.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Comes standard with ballast disconnects for safe maintenance.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WV760 SERIES WALL / VANITY 760



DIMENSIONS

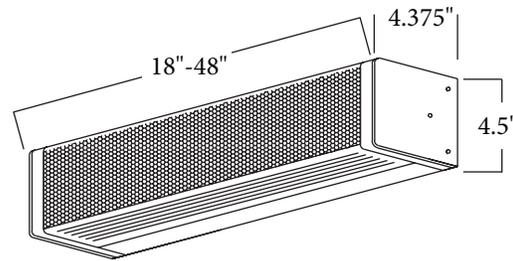

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Wall Vanity 760, 1 Lamp, F32T8, 48", White finish, Multi-Volt = WV76013248D)

--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	VOLTAGE	BALLAST FACTOR	OPTIONS
WV760	1 2	15 - 15 watt T8 (18")	18 - 18"	D - Multi-Volt	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start
		17 - 17 watt T8 (24")	24 - 24"	1 - 120V		P - Program Start
		25 - 25 watt T8 (36")	36 - 36"	2 - 277V		20 - ≤20% THD
		32 - 32 watt T8 (48")	48 - 48"	3 - 347V		EB5 - 500 Lumen Emergency Ballast
		28T8 - 28 watt T8 (48")		4 - 480V		EB7 - 700 Lumen Emergency Ballast
		*CFL - SPECIAL ORDER		*Multi-Volt is 120/277V		EB14 - 1400 Lumen Emergency Ballast
						EB30 - 3000 Lumen Emergency Ballast
						FBF - Fast-Blow Fuse
						SBF - Slow-Blow Fuse
						PC - Pull Chain
						RS - Rocker Switch
						CO - Convenience Outlet