



Catalog Number	
Project	Type

## FEATURES & SPECIFICATIONS

**FEATURES** — Combines an exit sign and emergency light into one low-profile unit. Energy-efficient LED technology. Provides 11W of remote wattage. EZ snap-out chevron direction indicators. UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**CONSTRUCTION** — Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish.

**ELECTRICAL SYSTEM** — Dual 120V/277V voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery. Internal solid-state transfer switch automatically connects the internal battery to LED board/lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.



**MOUNTING** — Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

**ILLUMINATION** — Standard with two 5.4 watt tungsten fully adjustable, glare-free incandescent emergency lighting heads. High-performance smooth thermoplastic reflector and plastic lens for optimal light distribution. Ultra-bright, energy efficient, long-life Red or Green LED.

**WARRANTY** — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



## Remote Capable Exit/Emergency Combo CRLE SERIES

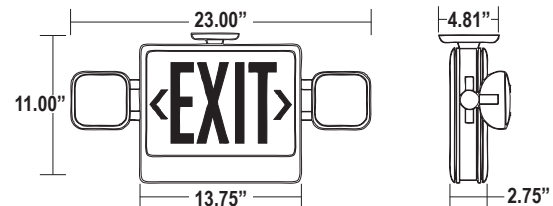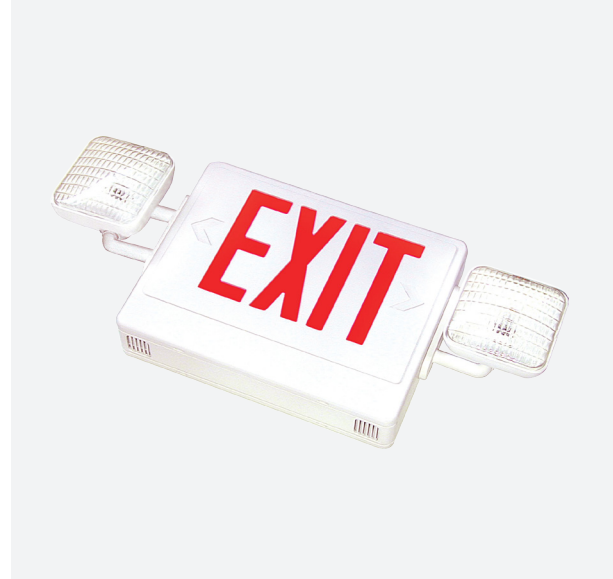

Series	Housing Height	Length & Width
<b>CRLE</b>	11.00"	23.00" x 2.75"

## ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

CRLE					
Series	Letter Color	Number of Faces	Housing Color	Remote Capable	Options
<b>CRLE</b>	<b>R</b> Red <b>G</b> Green	<b>2</b> Double Face	<b>W</b> White <b>B</b> Black	<b>RC</b> Remote Capable	<b>SD</b> Self Diagnostic <b>HT</b> Internal Heater <b>K5</b> 5.4W Krypton Lamps <b>K9</b> 9W Krypton Lamps

Example: **CRLER2W**