



2' Low Profile LED High Bay

| | |
|----------------|------|
| Catalog Number | |
| Project | Type |

FEATURES & SPECIFICATIONS

APPLICATION — The high lumen output luminaire is designed to be a replacement for HID and fluorescent high bays. It is optimal for lighting applications where long life, low maintenance, and consistent color rendering is required. Areas with limited accessibility due to fixture location or where heavy pedestrian or vehicle traffic makes maintenance difficult are ideal applications. The high wattage/lumen output allows the fixture to be used for warehouse, manufacturing and big box retail applications.

CONSTRUCTION — The LPHB Series body and housing assembly are ruggedly constructed from 22ga cold rolled steel sheet. Fixture is assembled with special thread forming sheet metal screws to prevent loosening from vibration. All hardware is zinc plated steel. Rigid stiffening brackets prevent twisting and bowing. Engineered for exceptional thermal performance using lightweight aluminum thermal LED heat sinks. Open structure design allows for natural convective cooling. Wireguard attachment points provided.

FINISH — LPHB Series body and driver housing are powder coated with lighting white high reflectance (93%) polyester paint.

OPTICAL SYSTEM — High efficiency linear LED modules with acrylic diffusers provide a medium-wide light distribution with exceptional vertical and horizontal performance. Optics provide 93% transmittance of light.

ELECTRICAL SYSTEM — Class 2 long life LEDs and high efficiency drivers work together to provide superior performance in a safe and efficient package. LPHB provides a wide range of output options, from 10,000 to 30,000 lumens. L95 at 10K hours L70 ≥ 50K hours. LEDs available in 5000K with a CRI >80. 0-10V



| SERIES | HOUSING HEIGHT | LENGTH & WIDTH |
|--------------|----------------|-----------------|
| LPHB2 | 1.65" | 24.80" x 15.75" |

dimming leads factory pre-connected at wire access plate. Electronic drivers are available in 100-277V or 120-277/347V configurations. Power factor >0.9. 0-10V dimming standard (dimming leads pulled through upon request). Modular wiring drop cord may be factory installed (contact your sales representative for details).

MOUNTING — Suitable for suspension mounting via 10' Aircraft Cable w/12" Arms w/Snap-in Clips (Set of 2 included), S Hooks w/10' Jack Chain Set or Tong Hanger, End Mount.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:

LPHB 2 C 30L FL 1 WOCLEV

| LPHB | | | | | | |
|--------|-----------------------------|-------------------------------|---|--|---|---|
| SERIES | SIZE | COLOR TEMP | NOMINAL LUMEN | LENS | VOLTAGE | OPTIONS |
| | 2 = 24.8"L x 15.75"W | C = Cool White (5000K) | 10L = 10,000 Lumen 15L = 15,000 Lumen 20L = 20,000 Lumen 25L = 25,000 Lumen 30L = 30,000 Lumen | FL = Frosted Polycarbonate Lens | 1 = 100-277V 2 = 347V-480V | HOEB = LED Battery Pack, 90 min AC63 = 6' x 3X 18AWG, 3/8"dia., Armored Conduit Flex Cable AC64 ¹ = 6' x 4X 18AWG, 3/8"dia., Armored Conduit Flex Cable AC65 ² = 6' x 5X 18AWG, 3/8"dia., Armored Conduit Flex Cable AC103 = 10', 3/8" Armored Flex Conduit w/12' BLK/WHT/GRN Wire WOCLEV ³ = Fixture Mount PIR Occupancy Sensor WOCBT ⁴ = Bluetooth Mesh Wireless Smart Control |

ACCESSORIES (Order as separate line items)

10JC (3) S Hooks and 10' Jack Chain Set

THE Tong Hanger, End Mount (Set of 2)

LPHBWG2 2' Wire Guard

NOTES

¹ = Must be used with HOEB if AC is required.

² = Notify factory if remote 0-10V dimming is required. AC65 required when armored conduit option is ordered and remote 0-10V dimming will be used.

³ = Input voltage 100-277V

⁴ = Input voltage 347-480V

MOUNTING ACCESSORIES


HOEB
LED Battery Pack, 90 min



C1, C2 and C3
6' Cord Sets with NEMA Style Twist-Lock Plug



THE
Tong Hanger, End Mount (Set of 2)




AC63
6', 3/8" dia., Armored Flex Cable



10JC
(3) S Hooks and 10' Jack Chain Set




G10C
10' Aircraft Cable w/12" Arms w/Snap-in Clips (Set of 2 included)



LPHB2 2' Low Profile LED High Bay

FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Additional options or accessories may add to the overall measurements shown.

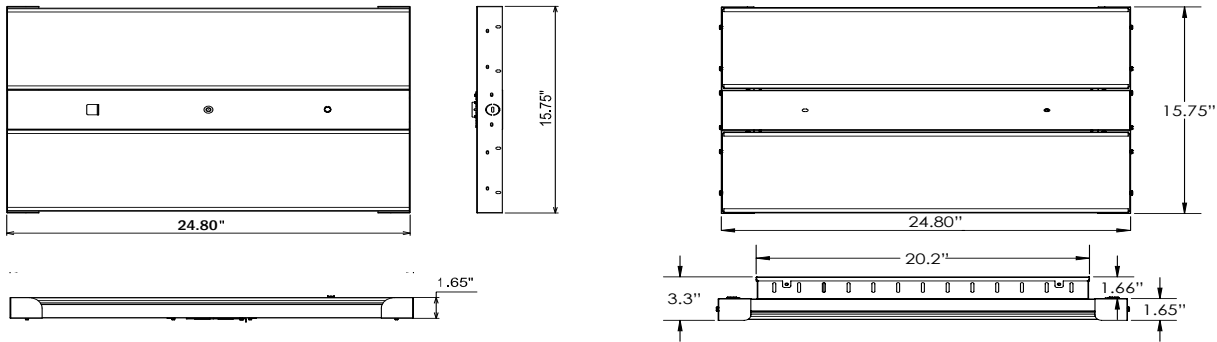

LUMINAIRE CHARACTERISTICS


ANSI 5000K CCT Performance Data (L70 >50K @ 25°C)

| Lumen I.D. | Nominal Lumens | Delivered Lumens | System Wattage | LPW | Amperage Draw | | | | | |
|------------|----------------|------------------|----------------|-----|---------------|------|------|------|------|------|
| | | | | | 120V | 208V | 240V | 277V | 347V | 480V |
| 10L | 10,000 | 10,327 | 58 | 177 | 0.49 | 0.28 | 0.24 | 0.21 | 0.17 | 0.12 |
| 15L | 15,000 | 15,231 | 87 | 174 | 0.73 | 0.42 | 0.36 | 0.32 | 0.25 | 0.18 |
| 20L | 20,000 | 20,183 | 117 | 173 | 0.97 | 0.56 | 0.49 | 0.42 | 0.34 | 0.24 |
| 25L | 25,000 | 24,918 | 146 | 171 | 1.22 | 0.70 | 0.61 | 0.53 | 0.42 | 0.30 |
| 30L | 30,000 | 29,638 | 175 | 169 | 1.46 | 0.84 | 0.73 | 0.63 | 0.50 | 0.36 |

PHOTOMETRICS

POLAR GRAPH

IES INDOOR REPORT
PHOTOMETRIC FILENAME : LPHB2C30LFL1.IES

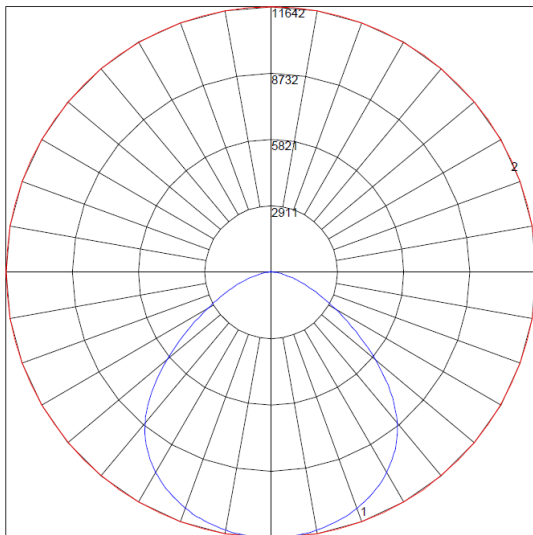

Maximum Candela = 11642.25 Located At Horizontal Angle = 90, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

CHARACTERISTICS

| | |
|---------------------------------|--------|
| Luminaire Efficacy Rating (LER) | 169 |
| Total Luminaire Watts | 175 |
| Ballast Factor | 1.00 |
| CIE Type | Direct |
| Spacing Criterion (0-180) | 1.30 |
| Spacing Criterion (90-270) | 1.30 |
| Spacing Criterion (Diagonal) | 1.38 |

ZONAL LUMEN SUMMARY

| Zone | Lumens | %Fixt |
|---------|----------|--------|
| 0-20 | 4290.54 | 14.50 |
| 0-30 | 9181.97 | 31.00 |
| 0-40 | 15103.33 | 51.00 |
| 0-60 | 25300.22 | 85.40 |
| 0-80 | 29195.55 | 98.50 |
| 0-90 | 29532.5 | 99.60 |
| 10-90 | 28428.91 | 95.90 |
| 20-40 | 10812.79 | 36.50 |
| 20-50 | 16627.91 | 56.10 |
| 40-70 | 12817.61 | 43.20 |
| 60-80 | 3895.35 | 13.10 |
| 70-80 | 1274.65 | 4.30 |
| 80-90 | 336.92 | 1.10 |
| 90-110 | 23.19 | 0.10 |
| 90-120 | 34.97 | 0.10 |
| 90-130 | 49.19 | 0.20 |
| 90-150 | 80.00 | 0.30 |
| 90-180 | 105.72 | 0.40 |
| 110-180 | 82.53 | 0.30 |
| 0-180 | 29638.21 | 100.00 |

LPHB2 2' Low Profile LED High Bay

FIXTURE MOUNT SENSOR

DIMMING OCCUPANCY SENSORS

WOCLEV PIR

Both highbay and lowbay lens are provided with fixture. Highbay lens is factory installed as standard. Lowbay lens must be field installed unless otherwise requested.



WOCBT PIR

Bluetooth Mesh Wireless Smart Control, Input voltage 120-277V.



ANDROID & IOS APP AVAILABLE FOR BLUETOOTH CONTROLLER



Android



IOS

FEATURES & SPECIFICATIONS

APPLICATION — The WOCBT and WOCLEV PIR Fixture Mount High Bay/Low Bay Dimming Occupancy Sensor with Integrated Photocell and Two Interchangeable Lenses provides 1-10V control. They both are easy to program and set for desired 1-100% continuous dimming levels during daylighting. Included with the sensor are lenses for high-bay and low-bay applications, allowing one unit to cover a variety of high ceiling areas such as warehouses, manufacturing and other high ceiling applications. The sensors provide reliable coverage up to 40 ft. mounting heights. They also are available in a model for cold storage applications with temperatures as low as -40° F.



MOUNTING — The sensors install directly to LED fixture through a standard 1/2" knockout using the provided locknut. Wiring is factory connected inside the fixture body.

FEATURES —

- 1-100% continuous dimming control
- Specifically designed for LED fixture control
- Patented AutoCal™ for set-it and forget-it photocell calibration
- Suitable for use in standard and cold storage applications
- Visual RGB LED indicators for device states and easy troubleshooting
- Alternating relay software for increased lamp life
- Interchangeable 360° high bay and low bay lenses included
- Adjustable time delay (no power required)
- Pre-stripped color-coded wire leads
- Quicksnap feature for easy installation
- H.I.S. (High Inrush Stability) Technology
- Zero crossing circuitry
- Robust mechanical latching relay
- Relay always returns to close after power loss event
- UL listed for electronic driver loads 120/277V

SENSOR LENSES FIELD OF VIEW

Offset Adaptor Accessory

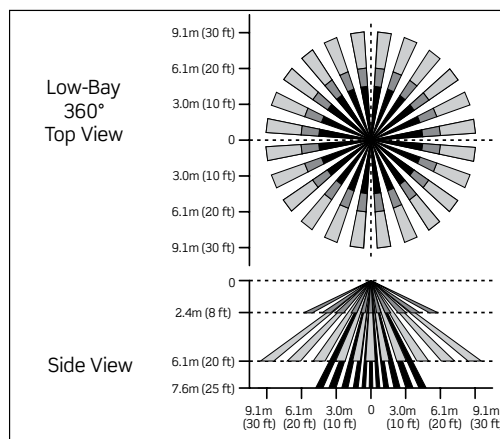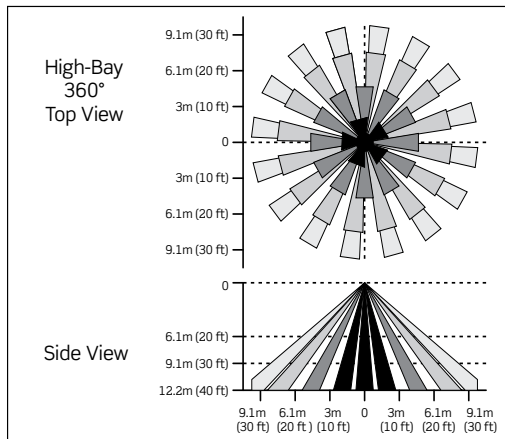

WARNING: Maintenance performed including the replacement of LED bricks while power is still supplied to the luminaire may result in system failures and will void the warranty.



TECHLIGHT
GROUNDED IN ILLUMINATION

2707 SATSUMA DR. | DALLAS, TX 75229 | PH: 800.225.0727 | TECHLIGHT@TECHLIGHT.COM | www.techlight.com

All dimensions and specifications are subject to change without notice.