



Catalog Number	
Project	Type

## FEATURES & SPECIFICATIONS

**APPLICATION** — The LWV213 Wall/Vanity fixture is useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms also for utility/area and task lighting. With 50,000 hours of life at L70 standard and a 5-year limited warranty the fixture maintenance cost is reduced substantially over time.

**CONSTRUCTION** — 20 gauge body and one-piece ends. Battery back-up holes provided for test switch and indicator light. Ends with tapped holes to accommodate tamper-proof or standard screws. Custom modifications in the physical specification and color are available.

**FINISH** — All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.


**ELECTRICAL SYSTEM** — Long life LED's and high efficiency drivers work together to provide superior performance in an efficient package to deliver optimal performance. LED's available in 3500K, 4000K and 5000K with a CRI >82. Electronic drivers are available in 120/277 volt applications. 0-10V dimming as well as 50% step dimming capabilities available upon request. When in the step dimming 50% position the 0-10V leads may still be utilized for further dimming control.

**LISTINGS** — ETL listed. LM79 and LM80 tested.

**WARRANTY** — The complete luminaire is covered by a 5-year limited warranty.



## LWV213 LED Wall/Vanity

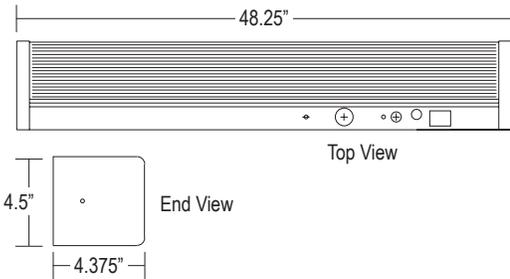

Series	Housing Height	Length & Width
<b>LWV213</b>	4.5"	48.25" x 4.375"

## ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **LWV213423335CWD**

<b>LWV213</b>						
Series	Length <sup>3</sup>	Wattage	Delivered Lumens/CCT	Diffuser	Finish	Voltage
<b>LWV213</b>	<b>2</b> 2'	<b>26</b> <sup>1</sup>	<b>24</b> 2445 Lumens / 3000K (26W Only)	<b>S</b> Smooth White	<b>W</b> White <b>C</b> Chrome <b>O</b> Oak <b>B</b> Brass	<b>D</b> Multi-Volt <sup>2</sup>
	<b>4</b> 4'	<b>42</b> <sup>1</sup> <b>52</b> <sup>1,4</sup>	<b>26</b> 2630 Lumens / 4000K (26W Only) <b>39</b> 3906 Lumens / 3500K (42W Only) <b>42</b> 4200 Lumens / 4000K (42W Only) <b>43</b> 4251 Lumens / 5000K (42W Only) <b>49</b> 4929 Lumens / 3500K (52W Only) <b>53</b> 5300 Lumens / 4000K (52W Only) <b>54</b> 5364 Lumens / 5000K (52W Only)			

### Options (Order as separate line items)

<b>PC</b>	Pull Chain
<b>RS</b>	Rocker Switch
<b>CO</b>	Convenience Outlet
<b>TPS</b>	Tamper Proof Screws
<b>TPDB</b>	Tamper Proof Drill Bit

### NOTES

- Actual wattage may differ by ±5% while operating 120/277V ±10%.
- Multi-Volt is 120/277V.
- Wattage/Delivered Lumen packages do not change based on the fixture being a 2/4' unit. 4' units may have the LED light components centered within the length of the fixture depending on wattage ordered.
- 52W unit only available in the 4' version.

# LWV213 LED Wall/Vanity

## Technical Data

### Energy Analysis

Input Voltage	120/277V	
System Input Power	26 Watts <sup>1</sup>	42 Watts <sup>1</sup>
Delivered Lumen Output	2150	3360
Efficacy	83 LPW	80 LPW
Standard Dimming Control	0-10V and Step Dimming 50%	
CCT	3500, 4000 Kelvin	
CRI	82 (minimum)	
Life Time Rating	50,000 hrs @ L70	
Input Frequency	50/60 Hz	
Power Factor	>0.9	
Operating Temp	30° to 50° C	

### Fixture Analysis

Dimensions	4.5" x 48.25" x 4.375"
Mounting	Wall Mount
Warranty	5-Year Limited

#### NOTES

<sup>1</sup> Actual wattage may differ by ±5% while operating 120/277V ±10%.



Horizon Linear Lighting  
2707 Satsuma Drive  
Dallas, TX, 75229  
Phone: 214-350-0591, 800-225-0727, Fax: 214-350-9137  
[www.horizonlightingllc.com](http://www.horizonlightingllc.com)