



Catalog Number	
Project	Type

Features & Specifications

Construction

Constructed with a full cutoff die cast aluminum housing. A tempered clear glass lens protects the optical system. Gasketed side hinge door for a weatherproof seal. Stainless steel hardware.

Optical System

Made for medium mounting heights ranging from 12' to 18'. Two piece pinged aluminum reflector. Meets Dark Sky requirements for full cutoff fixtures.

Electrical System

Provided with a medium base 4KV pulse rated socket. Fixtures are available with with up to 175W Metal Halide or 150W High Pressure Sodium, and 32W-42W Fluorescent light sources. Wall Packs come with an option of Multi-Tap (120V, 208V, 240V, 277V), 480V high power factor ballasts, 120V NPF ballasts, or 120V Fluorescent ballasts depending on the light source and wattage chosen.


Mounting

Built in template for mounting to electrical boxes. Threaded 1/2" and 3/4" NPT knockouts provided on side and rear of fixture.

Finish

A Super Durable Polyester powder coat finish is electrostatically applied. Standard colors available: Black, Bronze, White, OD Green, US Green. Custom colors available upon request.

MWP SERIES MEDIUM CUTOFF WALL PACK

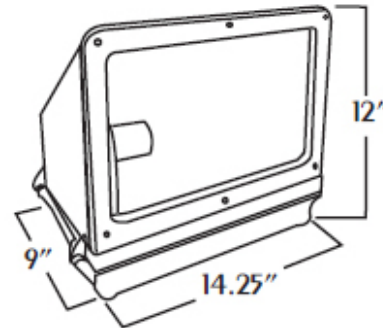

Est Shipping Weight:
18 lbs

Please contact your Techlight Sales Representative for more information.

Ordering Nomenclature

Ex: (Medium Cutoff Wall Pack 150W Pulse Start Metal Halide, Multi-Tap, Bronze = MWPB9A-CO-BZ)

MWPB					
-------------	--	--	--	--	--

SERIES MWPB	LIGHT SOURCE	VOLTAGE	CUTOFF CO = CUTOFF	EMERGENCY BALLAST	FINISH
	1 = 70W PSMH 2 = 100W PSMH 3 = 175W MH 4 = 70W HPS 5 = 100W HPS 6 = 150W HPS 8 = 50W HPS NPF 9 = 150W PSMH 10 = 50W PSMH 12 = 42W FLUOR 13 = DUAL 32W FLUOR 14 = DUAL 42W FLUOR	A = Multi-Tap ¹ B = 480V <small>1-50W HPS is only offered with a 120V NPF Ballast, 42W & 32W Fluorescent is provided with a 120V Ballast. Use Multi-Tap designation when ordering.</small>		B = 90 Minute Emergency Backup Ballast (Only available with 42W Fluorescent Model)	BK = BLACK BZ = BRONZE GR = OD GREEN WH = WHITE SP = SPECIAL