



TECHLIGHT
INNOVATION IN ILLUMINATION

Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

CONSTRUCTION — Made with a spun copper housing with stainless steel fasteners and die cast brass 1/2" Stem mount. Designed to efficiently operate PAR36 LED 14W lamps. A high temperature drain plug is provided for upright applications. Internal driver is ETL listed for wet locations (IP67). Meets US and Canadian safety standards. -40°C to 40°C ambient operation.

FINISH — Super Durable Polyester Powder Coat finish are available in standard colors: Natural Copper, Black, Bronze, White, OD Green. Custom colors available upon request.

OPTICAL SYSTEM — 15°, 24°, 60°, and 120° optics available in 90CRI 3000K. Standard shields include an up shield, downlight shield and tube statue spot shield.

ELECTRICAL SYSTEM — 120-240V input with internal driver (IP67 rated) and SPD (surge protection device) inside the bullet.

MOUNTING — Comes standard with a 1/2" threaded knuckle mount, fully adjustable swivel arm, and locking teeth. See available mounting accessories below.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

R3LWC-P36					
SERIES	LED	SHIELD	BEAM	VOLTAGE	FINISH
	14W	S24 = Down Shield S25 = Up Shield S148 = Tube Shield	15 = 15° 24 = 24° 60 = 60° 120 = 120°	1 = 120-240V	Blank = Natural Copper BZ = Bronze BK = Black ODG = OD Green WH = White SP ¹ = Special

NOTES

1 = Custom RAL color matching is available. Contact your sales representative for additional info.

MOUNTING ACCESSORIES (Order as separate line items)

B01GL
Tree Base with Ground Lug



B02
1/2" Conduit Base



B03
4" Round 3 Hole Cover



B06
Brass Tree Base



B10
1/2" Hub with Ground



LMSB
20" x 2.5" Mounting Stake w/ Brass Caps



TLSBBJB
Brass Junction Box



B16-12
Palm Tree Base with 12' Strap



R3LWC-P36 SERIES

PAR36 LED 14W Statue Spot




SERIES	HOUSING HEIGHT	LENGTH & WIDTH
R3LWC	7.0"	5.3" x 4.4"

EXAMPLE:

R3LWC-P36-14W-S24-15-1-BK

AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Mounting options must be ordered separately.



SHIELDS DIMENSIONS

B01GL
Tree Base with Ground Lug



B02
1/2" Conduit Base



B03
4" Round 3 Hole Cover



B06
Brass Tree Base



B10
1/2" Hub with Ground



LMSB
20" x 2.5" Mounting Stake w/ Brass Caps





TLSBBJB
Brass Junction Box






B16-12
Palm Tree Base with 12' Strap





S24
Down Shield



S25
Up Shield



S148
Tube Statue Spot Shield



www.techlight.com

R3LWC-P36 PAR36 LED 14W Statue Spot


BEAM/LAMP SPREADS AND TECHNICAL DATA

15 ° / Par36 / 14.0W


Beam Angle	15 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,020 Lumens
CCT	3000K
Lumens/Watt	73
CBCP	8897



CANDELA DISTRIBUTION


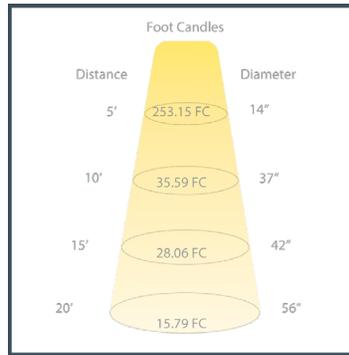


LUMINOUS INTENSITY

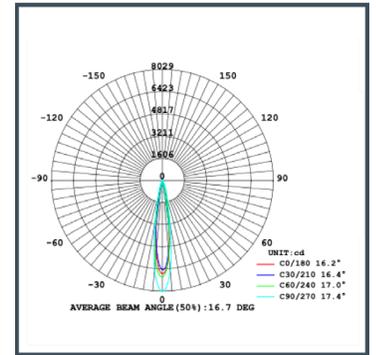



24 ° / Par36 / 14.0W

Beam Angle	24 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,100 Lumens
CCT	3000K
Lumens/Watt	79
CBCP	3086

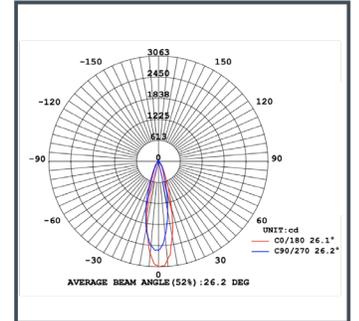



60 ° / Par36 / 14.0W

Beam Angle	60 Degrees
Wattage	14.0 W
CRI	90
Brightness	1,150 Lumens
CCT	3000K
Lumens/Watt	82
CBCP	1234

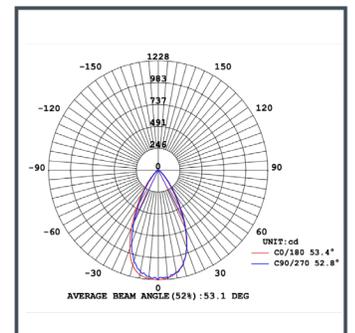

120 ° / Par36 / 14.0W

Beam Angle	120 Degrees
Wattage	14.0 W
CRI	90
Brightness	925 Lumens
CCT	3000K
Lumens/Watt	66
CBCP	415



WARNING: Maintenance performed including the replacement of LED lamps while power is still supplied to the luminaire may result in system failures and will void the warranty.

2707 SATSUMA DR. | DALLAS, TX 75229 | PH: 800.225.0727 | EMAIL: TECHLIGHT@TECHLIGHT.COM | www.techlight.com



TECHLIGHT
INNOVATION IN ILLUMINATION