



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

FEATURES — Redesigned housing is easily detachable providing accessibility from below. Energy efficient LED technology. Decals & template provided for chevron directional indicators. UL listed for damp locations. Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

CONSTRUCTION — • Premium-grade, extruded aluminum housing (also available in black or white powder coated. Housing is easily detachable from below, providing accessibility for service or maintenance.

ELECTRICAL SYSTEM — Dual 120V/277V voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. LVD (low voltage disconnect) prevents battery from deep discharge. Long-life, maintenance-free, rechargeable NiCd battery (B Model). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING — Drywall or drop-thru ceiling mount with hanger bars.

ILLUMINATION — Ultra-bright, energy efficient, long-life Red or Green LED. UV-stabilized ultra-clear acrylic edgelit panel provided consistent, uniform illumination.

WARRANTY — Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



Recessed LED Edgelit Exit Sign RELE SERIES

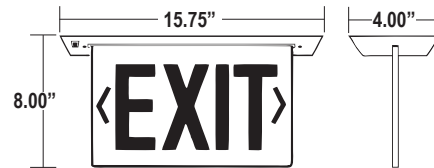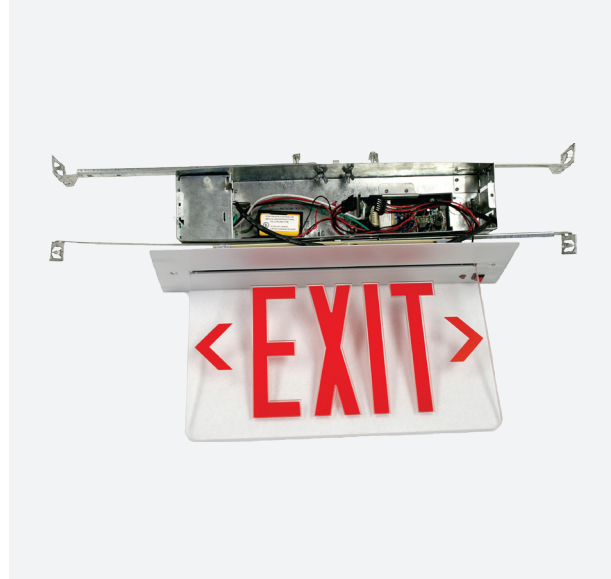

Series	Housing Height	Length & Width
RELE	8.00"	15.75" x 4.00"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **RELER2WW**

RELE						
Series	Letter Color	Number of Faces	Panel Color	Housing Color	Battery	Options
RELE	R Red G Green	1 Single Face 2 Double Face	C Clear M Mirror (Silver Mylar) W White (White Mylar)	W White B Black A Anodized Aluminum	Blank AC Only B Battery Back-Up	SD Self Diagnostic 2C Dual Circuit ¹

NOTES

1 Only one "hot" circuit at a time..