



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The SRF Flood Light is a compact HID light ideal for site, display, landscape, and general security lighting. Designed specifically for lighting small trees with medium canopies. A number of shielding options are available for customized effects.

CONSTRUCTION — The housing and door frame are constructed of die cast aluminum. The flat tempered glass lens is sealed in place and a door gasket is provided for weather tight protection. ETL listed for wet locations.


FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

ELECTRICAL SYSTEM — Available in 50W thru 150W pulse-start metal halide, high pressure sodium and mercury vapor. Comes standard with a 4KV pulse rated medium base socket. Each 60HZ CWA Multi-Tap¹ or 480V ballast is pre-wired and installed for convenience.

MOUNTING — Standard mounting option available is a 1/2" threaded knuckle mount. Additional mounting options may be available for custom applications.



Small Rectangular Flood SRF SERIES

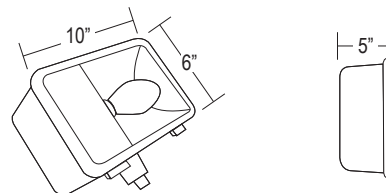

Series	Housing Height	Length & Width
SRF	6"	5" x 10"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **SRFBT-BZ**

Series	Wattage/Source	Finish
SRF	BA 50W Mercury Vapor Multi-Tap BC 100W Mercury Vapor Multi-Tap BT 50W Metal Halide Multi-Tap BD 35W High Pressure Sodium 120V NPF BE 50W High Pressure Sodium 120V NPF BF 70W High Pressure Sodium 120V NPF BG 100W High Pressure Sodium 120V NPF BH 150W High Pressure Sodium 120V NPF	BK Black BZ Bronze GR US Green WH White SP Special ²

Accessories (Order as separate line items)

B01 Tree Base	S19 SRF Visor Shield
B03 4" Round 3 Hole Cover	S85 SRF Copper Visor Shield
P4025D 2-3/8" OD Tenon Mount Adaptor	S62 SRF 4 Sided Shield
TLSBBJB Brass Junction Box	S88 SRF Louvered Shield
LMSB³ 20" x 2.5" Mounting Stake (Brass)	S50 SRF Vandal Shield
LMS³ 20" x 2.5" Mounting Stake (SCH 40 PVC)	S51 SRF Wire Guard
LMSZ-BK³ 20" x 2.5" Mounting Stake (Zinc Top Painted Black)	
P1000PC Button Type Photocell	

NOTES

- Multi-Volt is 120/208/240/277V wired 277V
- Custom RAL color matching is available. Contact your Techlight sale representative for additional information.
- Line voltage bullets require LARGE stakes.

SRF Small Rectangular Flood

MOUNTING ACCESSORIES

B01
Tree Base



P4025D
2-3/8" OD Tenon Mount Adaptor



B03
4" Round 3 Hole Cover



TLSBBJB
Brass Junction Box




LMSB, LMS, LMSZ-BK
20" x 2.5" Mounting Stakes




ADDITIONAL FIXTURE ACCESSORIES


S19
SRF Visor Shield




S88
SRF Louvered Shield




S85
SRF Copper Visor Shield




S50
SRF Vandal Shield



S62
SRF 4 Sided Shield



S51
SRF Wire Guard



Techlight, Inc.
2707 Satsuma Drive
Dallas, TX, 75229
Phone: 214-350-0591, 800-225-0727, Fax: 214-350-9137
www.techlight.com