



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION —The Genesis Gen2 line of LED Landscape Bullets are the most versatile LED fixtures on the market today. Various beam spreads and wattages allow for a customized finish to any property. The high end residential grade system was designed for low voltage operation residential applications.

CONSTRUCTION — The housing is made of compression molded fiber reinforced polyester composite. The color impregnated SR2 composite will not flake or peel. The LED light source is housed within a aluminum LED body with heat dissipating fins. An anti-siphon chamber is molded into the housing to keep internal electrical components from coming into contact with ground water. Multiple ring/guard assemblies are available for a customized finish.

OPTICAL SYSTEM — Techlight's proprietary OpticapSystem™ utilizes interchangeable optical lenses & reflectors to increase fixture lumen output efficiency. The system is provided with a high performance convex lenticular prismatic flood or a plano-convex spot optical lens. The flood & spot optical lenses are molded from low iron tempered glass. A 96% reflective UV stabilized injection molded reflector is included with each system. A variety of glass color filters are available to meet the designers specific color control needs. The composite guard rotates 360° for glare control.

ELECTRICAL SYSTEM — NOTE: A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty. Fixture operates at 120V input voltage. Nominal open circuit current .15 amps. A 17 watt LED source provides approximately 1086 (CW) Lumens of light. System is compatible with the use of a rotary TRIAC Dimmer.

TDB3W SERIES

Genesis Gen2 120V Medium LED Burial Light



SERIES	HOUSING HEIGHT	DIAMETER
TDB3W	12.8"	9.7"

MOUNTING — Fixtures are designed to be in-ground burial lights and should be installed according to the installation instructions made available by Techlight. Proper drainage and substrate must be provided for water to flow freely through the well sleeve. A 3/4" conduit entry is supplied into the anti-siphon chamber of the housing. Concrete pour kits available (see Accessories).

LISTINGS — ETL listed for wet locations (IP67). Meets US and Canadian safety standards. -40°C to 40°C ambient operation.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

EXAMPLE:

TDB3W FL 17 NW 120 CR CL

SERIES	DISTRIBUTION	WATTAGE	COLOR TEMP	VOLTAGE	RING/GUARD	LENS
TDB3W	FL = Flood (60°) SP = Spot (20°)	17 = 17W	CW = Cool White NW = Neutral White WW = Warm White	120 = 120V	CR = Composite Ring SR = Stainless Steel Ring CG = Composite Guard	FL = Flat Lens CL = Convex Lens SL = Slip Resistant Lens

ACCESSORIES (Order as separate line items)


- 102552¹** 10kV Surge Protector
- PK3** Concrete Pour Kit
- TDB3AFD** TDB3W Anti Floatation Device

NOTES

1 = A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty.

AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Mounting options must be ordered separately.

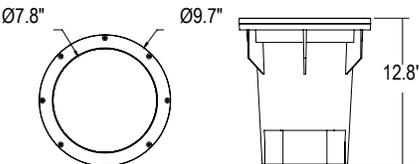

FIXTURE TRIM OPTIONS

Composite Ring



Stainless Steel Ring



Composite Guard




Flat Lens



Convex Lens



Slip Resistant Lens



TDB3W Genesis Gen2 120V Medium LED Burial Light

ADDITIONAL FIXTURE ACCESSORIES

GL2CAPCVXFLDREFL

60° Flood OpticapSystem™
Field Installable Flood Optic



Change the optic on the job by simply swapping the OpticapSystem™ on any fixture

102552¹

10kV Surge Protector



TDB2AFD

TDB3W Anti Floation Device



LEDLFG120LENS

Green Glass Lens Filter (each)



PK3

Concrete Pour Kit



GL2CAPSPOPTREFL

20° Spot OpticapSystem™
Field Installable Spot Optic



Change the optic on the job by simply swapping the OpticapSystem™ on any fixture

TLHB800RCH

Digital Timer



PSJ183

18 Gauge Lead Wire (Color Coded)



LEDLB120LENS

Blue Glass Lens Filter (each)



PERFORMANCE


ILLUMINANCE CONE DIAGRAMS

ILLUMINANCE CONE DIAGRAM

TDB3WFL17CW120

Flood Optic

17W TDB3W LED
Color Temperature: 5,900 K

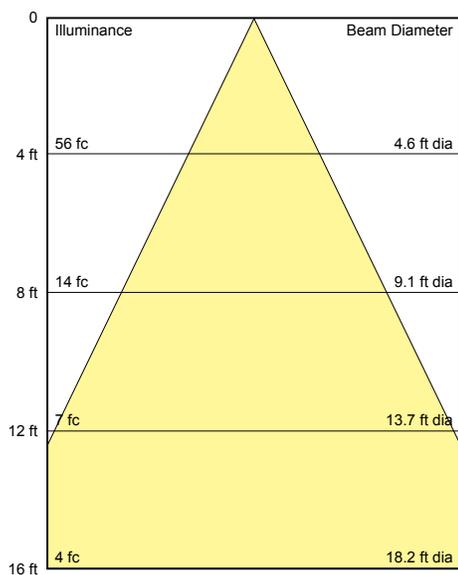


ILLUMINANCE CONE DIAGRAM

TDB3WSP17CW120

Spot Optic

17W TDB3W LED
Color Temperature: 5,900 K

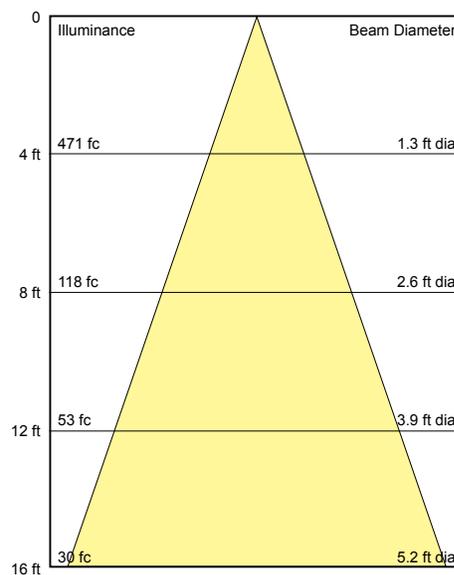

*Delivered lumens shown do not include light loss due to the fixture grill or lens.

Fixture	Color Temp	30W Lumen Output	
		FL	SP
TDB3W	CW (5900K)	1086	1171
	NW (4000K)	1039	1119
	WW (3000K)	1022	1101