



Catalog Number	
Project	Type

Features & Specifications

Construction

Die cast zinc housing. Offered standard with either a die cast long shield or die cast flush shield.

Optical System

Clear, tempered glass lens. Designed specifically for bi-pin MR16 operation and can accommodate a variety of MR16 beam spreads.

Electrical System

MR16 ceramic bi-pin socket with heat shield. Fixture requires a low voltage transformer to supply power. Comes standard with 3' #18/2 wire lead and a low voltage connector.

Mounting

Fully adjustable die-cast threaded swivel arm. 1/2" threaded NPT. This fixture is suitable for use in an **UP LIGHT POSITION ONLY.**


Finish

A Super Durable Polyester powder coat finish is electrostatically applied. Standard colors available: Black, Bronze, White, OD Green, US Green. Custom colors available upon request.

TLM16 SERIES Low Voltage MR16 BULLET UP LIGHT



DIMENSIONS

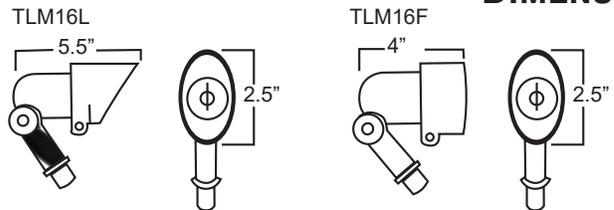

ACCESSORIES



Est Shipping Weight: 2 lbs

Please contact your Techlight Sales Representative for more information.

Ordering Nomenclature

Ex: (TLM16 Series Low Voltage MR16 Bullet, Long Shield, Black Finish = TLM16L-BK)

TLM16							
SERIES	SHIELD	FINISH		Accessories		Low Voltage Transformers	
TLM16	L Long Shield F Flush Shield	BK Black BZ Bronze GRN OD Green VRD Verde WH White SP Special	B01 Tree Base B06 Brass Tree Base B16-12 Palm Tree Base B10 1/2" Hub SMSB 12" x 1" Mounting Stake (Brass) MMSB 18" x 1" Mounting Stake (Brass) LMSB 20" x 2.5" Mounting Stake (Brass) LMS 20" x 2.5" Mounting Stake (SCH 40 PVC) LMSZ-BK 20" x 2.5" Mounting Stake (Zinc Top Painted Black) TLSBBJB Brass Junction Box TLL450B Honeycomb Louver TLL600B Honeycomb Louver	TLLET75 75W Transformer TLLET150 150W Transformer	LV Transformer Enclosures LVSS300 300W Stainless Steel LVSS600 600W Stainless Steel LVSS900 900W Stainless Steel	 Conforms to UL1838 Specifications	