



Catalog Number	
Project	Type

Features & Specifications

Application

This fixture is ideal for public, security, or high abuse areas such as correctional facilities, institutions, schools, shopping centers and other public buildings.

Features

Optimized for T8 or T5 lamp performance. Standard clear with white prismatic as option. Drill points for maximum security. Integral (molded) locking lugs opposite the retention screws. Standard stainless steel screws or optional tamper-tork screws. Wall or ceiling mounting for indoor or outdoor locations. Neoprene gasket eliminates moisture, dust and insects. Optional bronze conduit adapter for incandescent and fluorescent versions.

Construction

Housing is die-formed heavy gauge steel with white powder-coat finish. Injection molded prismatic polycarbonate with UV inhibitors.

Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic $\leq 10\%$ THD Instant Start. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex.


Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

VP SERIES VANDAL PROOF



DIMENSIONS

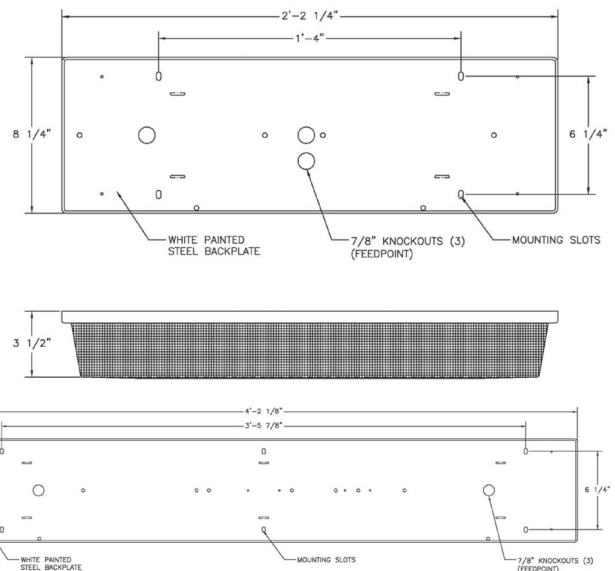

Please contact your Horizon Sales Representative for more information.
All dimensions subject to change without notice.

Ordering Nomenclature

Ex: (Vandal Proof, 2 Lamps, F32T8, Multi-Volt =VP232D)

--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE/TYPE	VOLTAGE	BALLAST FACTOR	OPTIONS
VP	1	14 - 14W T5, 22"	D - Multi-Volt	BLANK - Normal	10RS - $\leq 10\%$ THD, Rapid Start
	2	17 - 17W T8, 24"	1 - 120V	H - High	P - Program Start
	3	24 - 24W T5HO, 22"	2 - 277V	L - Low	20 - $\leq 20\%$ THD
		28T5 - 28W T5, 46"	3 - 347V		EB5 - 500 Lumen T8 Emergency Ballast
		28T8 - 28W T8, 48"	4 - 480V		EB7 - 700 Lumen T8 Emergency Ballast
		32 - 32W T8, 48"	*Multi-Volt is 120/277V		EB14 - 1400 Lumen T8 Emergency Ballast
		39 - 39W, T5HO, 34"			EB30 - 3000 Lumen T8 Emergency Ballast
		48HO - 60W 800mA, 48"			EB5T5 - 500 Lumen T5 Emergency Ballast
		54 - 54W T5HO, 46"			EB7T5 - 700 Lumen T5 Emergency Ballast
					EB14T5 - 1400 Lumen T5 Emergency Ballast
					SBF - Fast-Blow Fuse (Holder Included)
					SBF - Slow-Blow Fuse (Holder Included)
					AC63 - 6', 3/8" dia., Armored Flex Cable
					SJ6 - 6', 3/8" dia., 16/3 SJ Cord
					SJ10 - 10', 3/8" dia., 16/3 SJ Cord
					SJ15 - 15', 3/8" dia., 16/3 SJ Cord
					PWO - Palletized without Cartons
					CD - Continuous Dimming (T8)
					SD - Step Dimming (T8)
					CD5 - Continuous Dimming (T5)
					SD5 - Step Dimming (T5)