



Catalog Number	
Project	Type

## Features & Specifications

### Application

Wall/Vanity fixtures are useful for illuminating corridors, stairwells, lavatories, dressing rooms, patient rooms also for utility/area and task lighting.

### Features

Optimized for T8 or T5 lamp performance. To direct illumination up or down, fixture is equipped with a matching metal front.

### Construction

Housing constructed of bright anodized aluminum with a smooth white lens.

### Electrical System

ETL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lamp holders are replaceable without removing from wall. Discrete voltage must be specified for emergency pack options when wired with flex.


### Finish

All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.




## WV203 SERIES WALL / VANITY 203



### DIMENSIONS

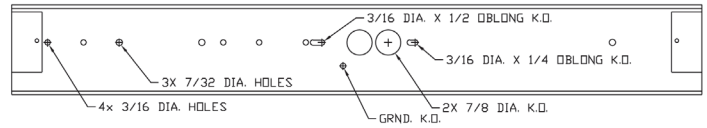

TOP  
W/O DIFFUSER

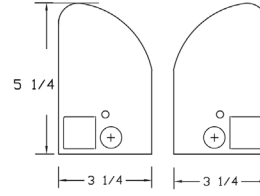

Please contact your Horizon Sales Representative for more information.  
All dimensions subject to change without notice.

### Ordering Nomenclature

Ex: (Wall Vanity 203, 1 Lamp, F32T8, 48", Bright Anodized Finish, Multi-Volt = WV20313248SWDC)

--	--	--	--	--	--	--	--	--

SERIES	NUMBER OF LAMPS	WATTAGE	LENGTH	DIFFUSER	VOLTAGE	FINISH	BALLAST FACTOR	OPTIONS
WV203	1	15 - 15 watt T8 (18")	18 - 18"	SW-Smooth White	D - Multi-Volt	C - Bright Anodized	BLANK - Normal H - High L - Low	10RS - ≤10% THD, Rapid Start
	2	17 - 17 watt T8 (24")	24 - 24"		1 - 120V			P - Program Start
		25 - 25 watt T8 (36")	36 - 36"		2 - 277V			Z0 - ≤20% THD
		32 - 32 watt T8 (48")	48 - 48"		3 - 347V			EB5 - 500 Lumen Emergency Ballast
		28T8 - 28 watt T8 (48")			4 - 480V			EB7 - 700 Lumen Emergency Ballast
		*CFL - SPECIAL ORDER			*Multi-Volt is 120/277V			EB14 - 1400 Lumen Emergency Ballast
								EB30 - 3000 Lumen Emergency Ballast
								FBF - Fast-Blow Fuse
								SBF - Slow-Blow Fuse
								PC - Pull Chain
								PC3 - 3 Step Pull Chain
								RS - Rocker Switch
								CO - Convenience Outlet
								CO2 - GFCI Convenience Outlet