



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The RCLS Recessed Canopy light was designed for low to mid-level lighting under storefront awnings, indoor retail applications, or any recessed mount lighting application. The finished product is an unobtrusive light fixture where you see the results, and not the fixture itself.

CONSTRUCTION — The fixture is constructed of extruded aluminum with welded seams. A clear prismatic glass lens is gasketed in place to make the fixture weather resistant.



FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.

OPTICAL SYSTEM — High reflectance white paint directs the light down through a clear prismatic tempered glass lens for a uniform light pattern.

ELECTRICAL SYSTEM — Available with two F40 Biax 4 Pin High Lumen lamps. Fluorescent ballast is pre-wired and installed for convenience.



Recessed Rectangular Fluorescent Canopy RCLS SERIES

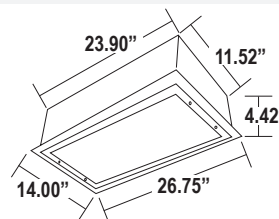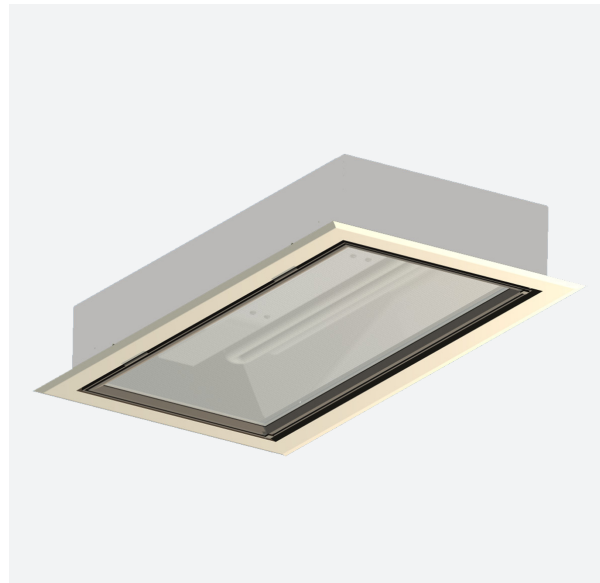

Series	Housing Height	Length & Width
RCLS	4.42"	26.75" x 14.00"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

RCLSRF1A	
Series	Finish
RCLSRF1A 2-40W Biax High Lumen	BK Black BZ Bronze GR OD Green USG US Green WH White SP Special ²

Example: **RCLSRF1A-WH**

Accessories

-B² 550 Lumen, 90 Minute Emergency Ballast

NOTES

- 1 Custom RAL color matching is available. Contact your Techlight sale representative for additional information.
- 2 Order as "-B" at the end of the fixture part number.