



Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The Genesis Gen2 line of LED Landscape Bullets are the most versatile LED fixtures on the market today. Various beam spreads and wattages allow for a customized finish to any property. The high end residential grade system was designed for low voltage operation residential applications.

CONSTRUCTION — The housing is made of compression molded fiber reinforced polyester composite. The color impregnated SR2 composite will not flake or peel. The LED light source is housed within an aluminum LED body with heat dissipating fins. An anti-siphon chamber is molded into the housing to keep internal electrical components from coming into contact with ground water. Multiple ring/guard assemblies are available for a customized finish.

OPTICAL SYSTEM — Techlight's proprietary OpticapSystem™ utilizes interchangeable optical lenses & reflectors to increase fixture lumen output efficiency. The system is provided with a high performance convex lenticular prismatic flood optical lens. The flood optical lenses are molded from low iron tempered glass. A 96% reflective UV stabilized injection molded reflector is included with each system. The OpticapSystem utilizes field interchangeable shields designed for optimum glare control in up or downlighting positions. The shields are field rotatable to allow adjustment of shielding. A variety of glass color filters are available to meet the designers specific color control needs. The composite guard rotates 360° for glare control.

ELECTRICAL SYSTEM — NOTE: A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty. Fixture operates at 9-16VAC input voltage. A 13 watt LED source provides approximately 511 (CW) Lumens of light.

TDB2W SERIES

Genesis Gen2 LV Small LED Burial Light



SERIES	HOUSING HEIGHT	DIAMETER
TDB2W	11.33"	6.6"

MOUNTING — Fixtures are designed to be in-ground burial lights and should be installed according to the installation instructions made available by Techlight. Proper drainage and substrate must be provided for water to flow freely through the well sleeve. A 3/4" conduit entry is supplied into the anti-siphon chamber of the housing. Concrete pour kits available (see Accessories).

LISTINGS — ETL listed for wet locations (IP67). Meets US and Canadian safety standards. -40°C to 40°C ambient operation.

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but should still be ordered as a separate line item.

EXAMPLE:

TDB2W FL 13 NW LV CR CL

SERIES	DISTRIBUTION	WATTAGE	COLOR TEMP	VOLTAGE	RING/GUARD	LENS
TDB2W	FL = Flood (60°)	13 = 13W	CW = Cool White (5900K) NW = Neutral White (4000K) WW = Warm White (3000K)	LV = 9-16VAC	CR = Composite Ring BR = Brass Ring SR = Stainless Steel Ring CG = Composite Guard	FL = Flat Lens CL = Convex Lens SL = Slip Resistant Lens

ACCESSORIES (Order as separate line items)

- 102552¹** 10kA Surge Protector
- PK2** Concrete Pour Kit
- TDB2AFD** TDB2W Anti-Floatation Device

NOTES


1 = A Techlight Surge Protector must be incorporated into the LED system at the beginning of each circuit as a minimum. Failure to do so will void the system warranty.



TDB2W Genesis Gen2 LV Small LED Burial Light

AVAILABLE FIXTURE DIMENSIONS

Dimensions shown are for fixture bodies only. Mounting options must be ordered separately.

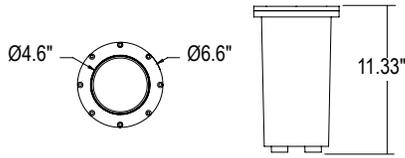

FIXTURE TRIM OPTIONS

Composite Ring



Brass ring



Stainless Steel Ring



Composite Guard



Flat Lens



Convex Lens



Slip Resistant Lens



ADDITIONAL FIXTURE ACCESSORIES

GL2CAPCVXFLDREFL

60° Flood OpticapSystem™
Field Installable Flood Optic



Change the optic on the job by simply swapping the OpticapSystem™ on any fixture

102552¹

10kA Surge Protector



TDB2AFD

TDB2W Anti-Floatation Device



LEDLFG120LENS

Green Glass Lens Filter (each)



PK2

Concrete Pour Kit



TLHB800RCH

Digital Timer



PSJ183

18 Gauge Lead Wire (Color Coded)



LEDLB120LENS

Blue Glass Lens Filter (each)



TRANSFORMERS



ELV300 300W AC Low Voltage Enclosure
ELV600 600W AC Low Voltage Enclosure
ELV900 900W AC Low Voltage Enclosure
ELV1200 1200W AC Low Voltage Enclosure

ELV300 thru ELV1200 are 120VAC-11-15VAC magnetic stepdown transformers. They have 11, 12, 13, 14, 15VAC outputs. The 600W, 900W, & 1200W units have 2ea, 3ea, & 4ea 300W rated output circuits respectively. They are enclosed in an aluminum NEMA raintight enclosure polyester powder coated BK finish.



ELV300MV24DCSS

300W DC Transformer in a Stainless Steel Enclosure

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Power Factor	
					110Vac	220Vac
24 Vdc	90 ~ 305 Vac	0 ~ 12.5 A	300 W	91%	.99	.96



ELV500MV24DCSS

500W DC Transformer in a Stainless Steel Enclosure

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Power Factor	
					110Vac	220Vac
24 Vdc	175 ~ 305 Vac	0 ~ 20.83 A	500 W	94%	.99	.96



LVSS300 300W SS AC Low Voltage Enclosure
LVSS600 600W SS AC Low Voltage Enclosure
LVSS900 900W SS AC Low Voltage Enclosure
LVSS1200 1200W SS AC Low Voltage Enclosure

LVSS300 THRU LVSS1200 are 120VAC-11-15VAC magnetic stepdown transformers. They have 11, 12, 13, 14, 15VAC outputs. The 600W, 900W, & 1200W units have 2ea, 3ea, & 4ea 300W rated output circuits respectively. They are enclosed in a stainless steel NEMA raintight enclosure, with natural finish.


The **ELV150MV24DCSS** thru **ELV500MV24DCSS** are 120-277VAC – 24VDC electronic power supplies. They are equipped with surge protection, and are enclosed in a stainless steel NEMA raintight enclosure with natural finish.

TDB2W Genesis Gen2 LV Small LED Burial Light

PERFORMANCE

ILLUMINANCE CONE DIAGRAMS

TDB2WFL13CWLV 13W TDB2W LED
Flood Optic Color Temperature: 5,900 K

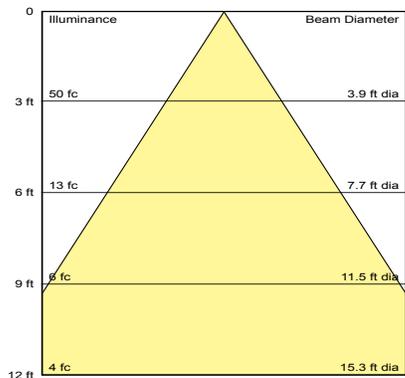

*Delivered lumens shown do not include light loss due to the fixture grill or lens.

Fixture	Color Temp	13W Lumen Output
		FL
TDB2W	CW (5900K)	511
	NW (4000K)	485
	WW (3000K)	459

WARNING: The driver assembly is wired and programmed specific to the unit configuration ordered. Any attempt to modify this unit will void the warranty.



TECHLIGHT
 INNOVATION IN ILLUMINATION

2707 SATSUMA | DR. DALLAS, TX 75229 | PH: 800.225.0727 | www.techlight.com